


TYPE: URANUS LED

IP65 FLOODLIGHT

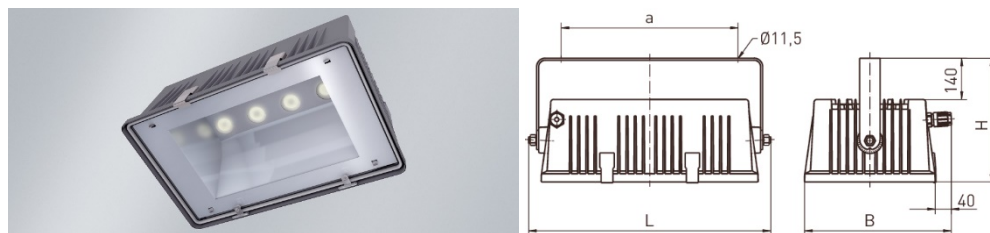

FEATURES

IP65 LED floodlight. Robust luminaire housing, made of cast aluminium with coated surface, colour like RAL 9006. Sealing system made of age resistant, form retaining silicone/synthetic rubber. Hinged, frameless cover screen made from PC clear (IK09/IK10), safety cover glass (IK09) clear or structured safety cover glass (IK09). Internal aluminium reflector (MIRO SILVER®).

Different beam angle available: narrow beam, medium beam, concentrated beam, asymmetric beam. Additional prism screens available: asymmetric ADP, symmetric glare reduction CDP, linear glare reduction LDP.

Luminaire to be connected to 230V AC/DC. Suitable for central emergency systems. Internal driver. Available in 3000K/4000K/5000K. CE – ENEC – VDE – D certified. Protection class 1. Ambient temperatures -35°C to 40/45°C (dependant on version). L80B10 > 60.000h (at 40/45°C). 5 year manufacturer warranty.

Ceiling mounting with two fixing bolts M10 or stainless steel swivel bracket.

Light technical data available for calculations in DIALux.

VERSIONS

Version	Beam angle	L/W/H in mm*	Lumenoutput (4000K)**	Max temp.	Power (in W)
186N	Concentrated	528/318/200	13593	45°C	115
186N	Medium	528/318/200	12976	45°C	115
186N	Narrow	528/318/200	12555	45°C	115
186N	Asymmetric	528/318/200	13213	45°C	115
248N	Concentrated	528/318/200	17567	40°C	162
248N	Medium	528/318/200	16769	40°C	162
248N	Narrow	528/318/200	16225	40°C	162
248N	Asymmetric	528/318/200	17076	40°C	162

*Dimension with 2xM10 fixing bolt.

**Nett lumenoutput

These LED values can change according to the evolution of the market. The current data can be found on the website of the manufacturer.

OPTIONS

Polymerg land with strain relief M20 – Ball impact resistant version - Locking swivel bracket – Anti-vibration dampening bracket – Halogen free version – Ral coating – Swimming pool version

VERSION(S) FOR THIS PROJECT: